# Brighton Tru-Edge Heads

# Dished Only

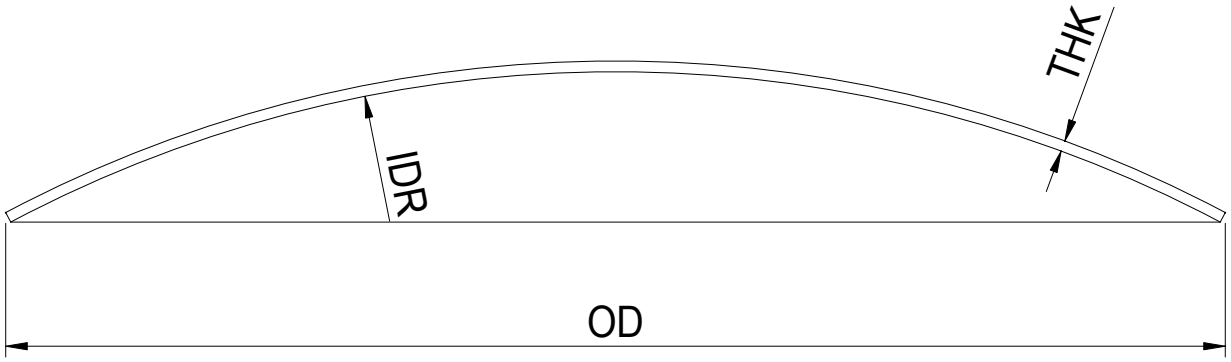


IDR - Inside Dish Radius
THK - Thickness
OD - Outside Diameter

## Specifications

Inside Dish Radius - Typically 100% of Diameter
Typical Thin Out Allowance - 1/2" and Under - Add .03125" to the minimum
- Over 1/2" - Add .0625" to the minimum

| Diameter | 10 GA | 3/16 | 1/4 | 5/16 | 3/8 | 1/2 | 3/4 | 1 | 1 1/2 | 2 |
|---|---|---|---|---|---|---|---|---|---|---|
| 18 | X | X | X | X | X | X | X | X | X | X |
| 24 | X | X | X | X | X | X | X | X | X | X |
| 30 | X | X | X | X | X | X | X | X | X | X |
| 48 | X | X | X | X | X | X | X | X | X | X |
| 60 | X | X | X | X | X | X | X | X | X | X |
| 72 | X | X | X | X | X | X | X | X | X | X |
| 84 | | X | X | X | X | X | X | X | X | X |
| 96 | | X | X | X | X | X | X | X | X | X |
| 108 | | X | X | X | X | X | X | X | X | X |
| 120 | | X | X | X | X | X | X | X | X | X |
| 132 | | X | X | X | X | X | X | X | X | X |
| 144 | | X | X | X | X | X | X | X | X | X |
| 156 | | | X | X | X | X | X | X | X | X |
| 168 | | | X | X | X | X | X | X | X | X |
| 174 | | | X | X | X | X | X | X | X | X |
| 192 | | | X | X | X | X | X | X | X | X |
| 216 | | | | X | X | X | X | X | X | X |
| 228 | | | | X | X | X | X | X | X | X |
| 240 | | | | X | X | X | X | X | X | X |
| 264 | | | | X | X | X | X | X | X | X |
| 288 | | | | X | X | X | X | X | X | X |
| *305 | | | | X | X | X | X | X | X | X |

*Heads over 305" can be fabricated as segmented heads.
Parameters are given as reference only. Please call your salesman for specific inquiries.
Other sizes and thickness, including light gauge jacket heads, are available on application.
Ask us about polishing, burning nozzle openings, or applying jacketing to your Heads.

Brighton Tru-Edge Heads | 4955 Spring Grove Ave. | Cincinnati, OH 45232
513-641-0500 | 800-543-1644 | FAX 513-771-2404 | www.brightontruedge.com